

Hand Dryer

Automatic




HIGH SPEED

HIGHSPEED HAND DRYER

Operating Instructions and Parts Manual (Automatic)

Surface Mount

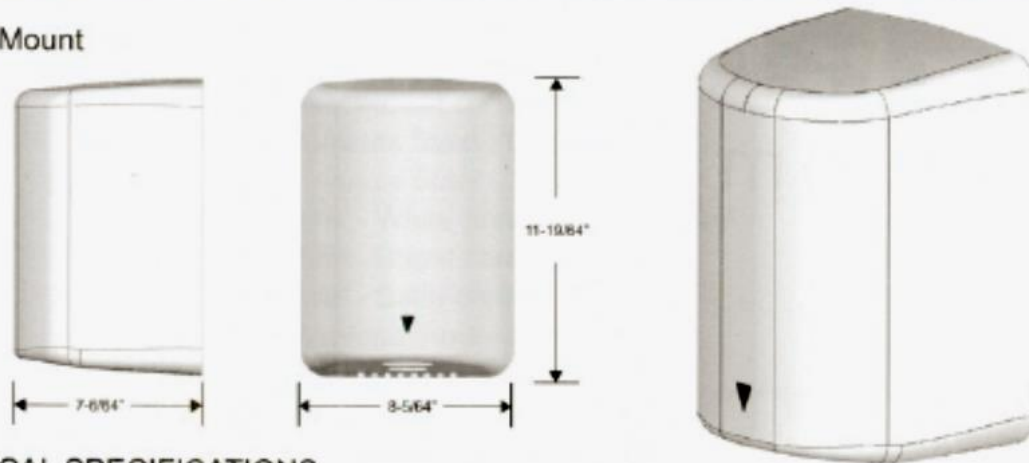

TECHNICAL SPECIFICATIONS

ITEM CATEGORY	PERFORMANCE DATA
Operating Voltage	110-120Vac, 50/60 Hz, 1.34-1.6 kW 220-240Vac, 50/60 Hz, 1.34-1.6 kW
Warm Air Speed Output	168-224 mi/hr (75-100 m/s), adjustable
Air Output Temperature	113°F (45°C) – Ambient Temp. 68°F (20°C)
Dryer Shall Deliver	51-68 CFM (87-116 m ³ /h)
Motor Type	15/16HP, 350-700W, 12000-18000 R.R.M., Adjustable; Brush Type, Dual Ball Bearings
Motor Thermal Protection	Auto Resetting Thermostat turns unit off, 120V at 275°F (135°C), 240V at 221°F (95°C) - US-Spec 240V at 221°F (105°C) - EURO Spec
Heater Element	450-900W, adjustable
Heater Thermal Protection	Auto Resetting Thermostat turns unit off at, 149°F (65°C)
Drying Time	Less than 15 seconds
Circuit Operation	Infrared Automatic, self adjusting
Sensor Range	2" to 13" [51 mm to 330 mm], adjustable; standard 7" [18 cm±2 cm]
Timing Protection	60 seconds auto shut off
Drip proof	IPX1 ♦
Isolation	CLASS 1
Net Weight	12.8 lbs (5.8 kg)
Shipping Weight	14.6 lbs (6.6 kg)
Unit Size	8-5/64" W x 11-19/64" H x 7-6/64" D [205 mm x 287 mm x 180 mm]

COVER TYPE/ COVER FINISH

- Steel; White porcelain enameled coating. (t:1.6 mm)
- Steel; Bright chrome. (t:1.6 mm)
- Steel; Satin chrome. (t:1.6 mm)
- Stainless Steel; Bright finished. (t:1.5mm)
- Stainless Steel; Satin finished. (t:1.5mm)